

UAG: Changing Array Manager


Skill level: Intermediate

Requires: UAG Management console


This document will provide instructions on how to change the UAG server roles. In this scenario, CLXWSA01 is the array manager and CLXWSA02 is the array member that is joined to CLXWSA01. Both servers share the same configurations which are managed by the array manager. All changes in the configuration must be configured on the array manager. In the event the array manager should fail, you will want to promote the array member to take on the array manager role.

To promote the UAG member to manager:


1. Console into the **UAG appliance**.
2. Navigate to Start/All Programs/Forefront UAG. Launch the Forefront UAG Management console.
3. Once you launch the Forefront UAG Management, you will be presented with the following wizard. Choose the option to Set this server as the array manager and click **Next**.

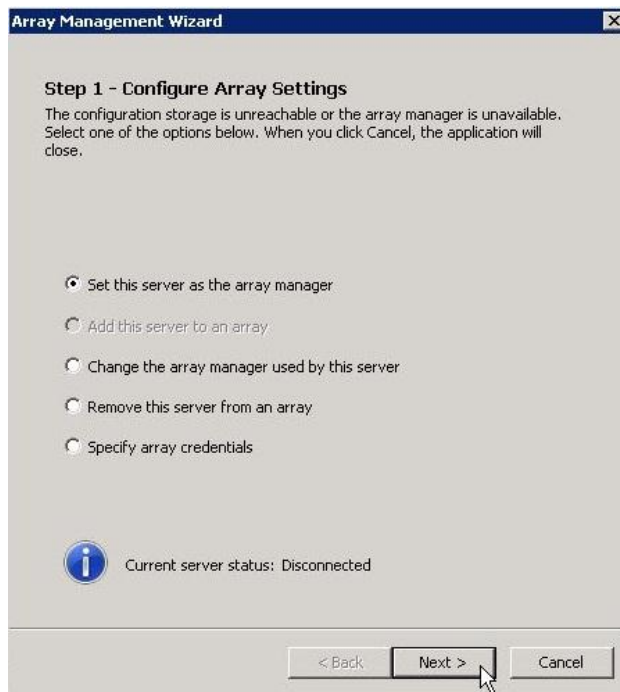


4. Enter your credentials, confirm your password and enter the domain. Click **Next**.

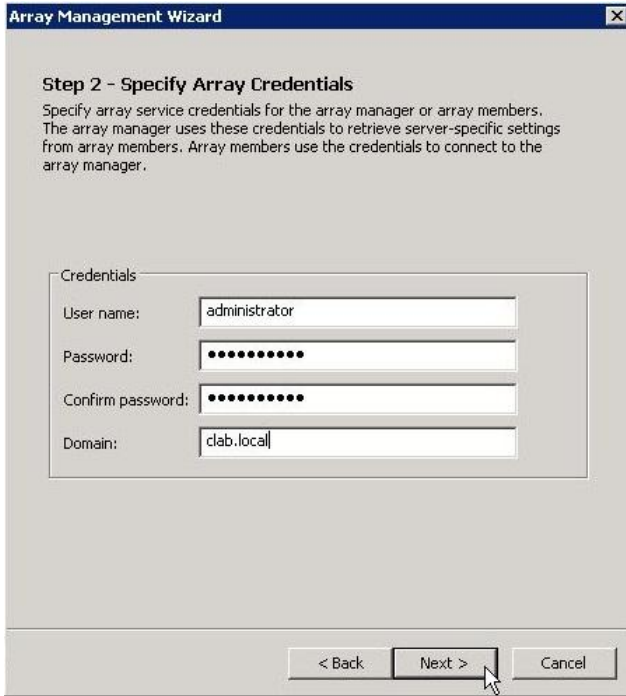


5. Click **Add** to define the new array manager.

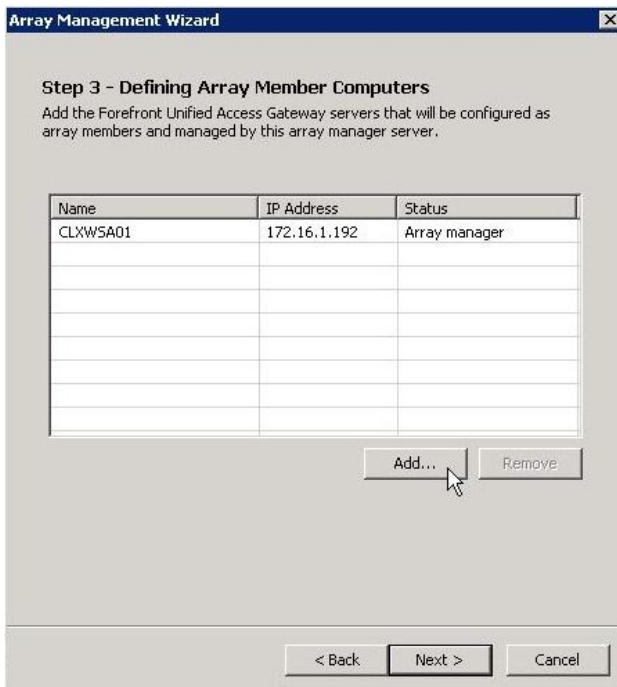


6. Enter the hostname and the IP address of the new array manager. Click **OK**.

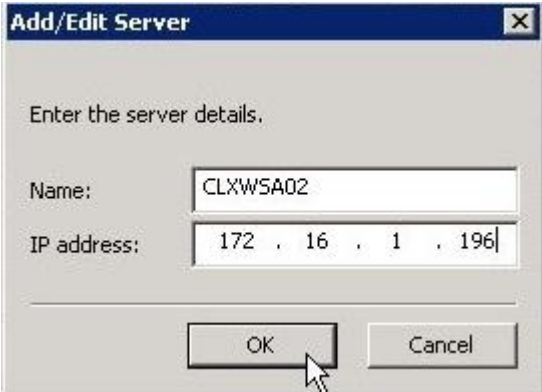

7. Click **Next**.

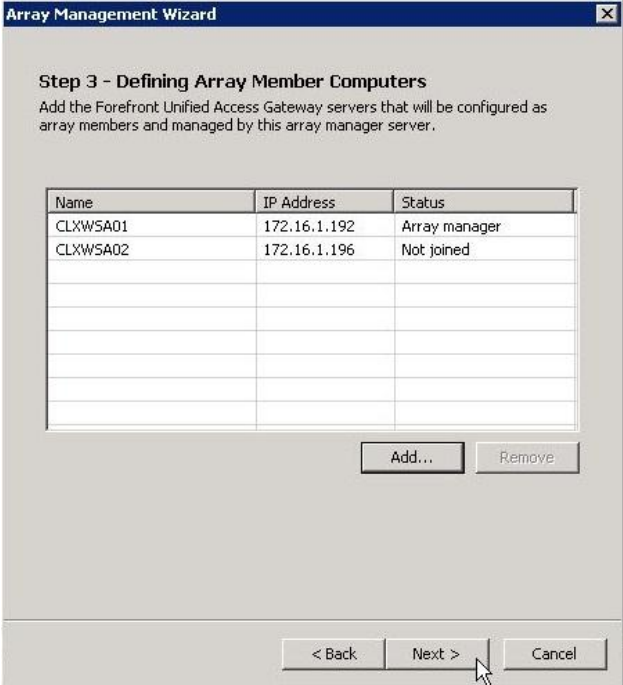

8. Click **Finish**.

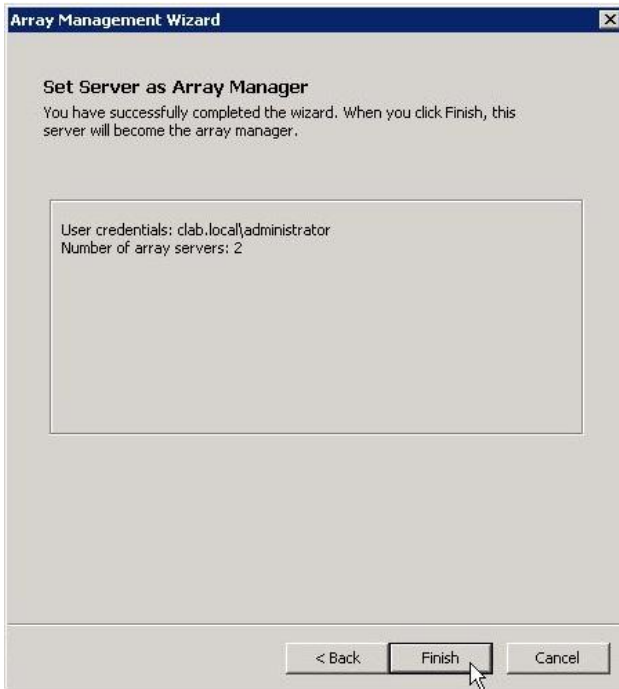

9. Once the array manager has been successfully configured. Click **OK**.



You have completed the steps to change the UAG manager.

